

# RottnerUNLOCK

**PAŽNJA !** Molimo pažljivo pročitajte ove upute za upotrebu prije dodavanja nove Bluetooth brave ili bilo kakvih promjena. Ne prihvaćamo nikakvu odgovornost za kvarove uzrokovane nepravilnim radom ili upotrebom sile ili nepravilnim rukovanjem, niti za imovinsku štetu ili finansijski gubitak koji se mogu pripisati, naprimjer, nepravilnom zaključavanju ili radu sefa.

## VAŽNO!

Uz vaš sef se isporučuju dva (2) pojedinačna ključa za otvaranje u slučaju nužde. Držite ih pažljivo (NE u sefu), jer se iz sigurnosnih razloga od brojeva ne mogu napraviti dodatni ili zamjenski ključevi (tvornički ili serijski brojevi na ključevima). Ako otvaranje pomoći brave BlueTooth nije moguće (baterije su prazne) i nije vam dostupan nijedan od dva dostupna ključa za hitno otvaranje, sef se mora otvoriti na silu.

Preporučujemo da koristite samo visokokvalitetne baterije (npr. VARTA Longlife Power) kako biste osigurali da vaša BlueTooth brava radi.

Dva (2) pojedinačna QR koda za Bluetooth bravu su uključena u paket, čuvajte ih na sigurnom mjestu.

U aplikaciji „RottnerUNLOCK“ tvornička lozinka je 0 - 0 - 0 - 0 - 0 - 0. Nakon instaliranja Bluetooth brave, preporučujemo da je iz sigurnosnih razloga odmah promjenite u ličnu šestocifrenu lozinku (pogledajte upute za upotrebu „PROMJENA LOZINKE“).

## **POČETAK / HITNO OTVARANJE**

1. Uklonite poklopac brave za slučaj nužde na svom sefu
2. Umetnite jedan od dva predviđena ključa za otvaranje u slučaju nužde
3. Okrenite ključ za slučaj nužde udesno / u smjeru kazaljke na satu do kraja
4. Okrenite / pomaknite ručicu za otvaranje do kraja i otvorite vrata.
5. Okrenite ključ za slučaj nužde ulijevo u početni položaj i uklonite ga
6. Uklonite poklopac odjeljka za baterije s unutarnje strane vrata
7. Umetnite dvije (2) baterije od 1,5 volta „AA“. Obratite pažnju na ispravan polaritet baterija kako biste izbjegli oštećenje elektroničke brave
8. Zatvorite odjeljak za baterije

## **INSTALACIJA APLIKACIJE**

1. Preuzmite aplikaciju "RottnerUNLOCK" sa Google Playstore (Android) ili APP Store (IOS) i instalirajte je
2. Otvorite APLIKACIJU "RottnerUNLOCK"

WELCOME TO

Rotline is helping you  
start so that you can

During the painting  
farther away



Pritisnite dugme "+" da dodate Bluetooth zaključavanje.



Searching for devices

- OKXGLN25  
E4813F21EB68
- OKUSSOM1  
F07E971E00A
- AiPeiTf  
A20200000000
- OKXGLN25  
D9C01B1F526A



Odaberite odgovarajuću Bluetooth bravu



OKUSS0M1  
FB FE 09:18 09:3A

Please scan the QR code which you can find in the packaging.

SCANNING



Pritisnite „Skeniranje“



Skenirajte QR kôd na poklopcu odjeljka za baterije



Name: OKUSSOM1

Id: FB:FE:C9:1B:D0:3A

Password: ex. '000000'

Repeat password: ex. '000000'

#### Security level ⓘ

Password	<input type="radio"/>
OneClick	<input type="radio"/>
Fingerprint	<input type="radio"/>
Proximity	<input type="radio"/>



Dodijelite naziv za odabrani Bluetooth - Naziv (npr. Sample Safe)

Unesite tvorničku lozinku (0 - 0 - 0 - 0 - 0 - 0).

Potvrdite tvorničku lozinku (0 - 0 - 0 - 0 - 0 - 0) PAŽNJA! Iz sigurnosnih razloga preporučujemo da tvorničku lozinku što prije promijenite u ličnu šestocifrenu lozinku

Odaberite željenu vrstu otvaranja za BlueTooth bravu ispod stavke "Nivo sigurnosti".

- Lozinka: Otvara se brava BlueTooth - „RottnerUNLOCK“ unošenjem prethodno dodijeljene lozinke.
- Jedan klik: otvara se brava BlueTooth - „RottnerUNLOCK“ pritiskom na „„.
- Otisak prsta: Otiskom prsta otvara se brava BlueTooth - „RottnerUNLOCK“.
- Blizina: Otvara se brava BlueTooth - „RottnerUNLOCK“ držanjem mobilnog telefona u radijusu od najviše 2 metra.



Repeat password: ex. '000000'

#### Security level ⓘ

Password	<input type="radio"/>
OneClick	<input type="radio"/>
Fingerprint	<input type="radio"/>
Proximity	<input type="radio"/>

Add connection



Na početni ekran sada možete dodati prečicu za zaključavanje Bluetooth-a.  
Spremite postavke pritiskom na □

## PROMIJENITE LOZINKU

Otvorite APP "RottnerUNLOCK"



WELCOME TO ROTTNER SMART LOCK!

Rottner is helping you with everything you need to get started so that you can enjoy comfort and security.

Bluetooth MusterTresor



Odaberite bravu za koju treba promijeniti lozinku



MusterTresor



Bluetooth connection with lock:

CONNECTED



UNLOCK



Pritisnite

Pritisnite „PROMIJENI LOZINKU“



Name: MusterTresor

Id: FB:FE:C9:1B:D0:3A

CHANGE PASSWORD

Security level ⓘ

- |             |                                  |
|-------------|----------------------------------|
| Password    | <input type="radio"/>            |
| OneClick    | <input checked="" type="radio"/> |
| Fingerprint | <input type="radio"/>            |
| Proximity   | <input type="radio"/>            |

SHOW QR-CODE

ADD CONNECTION

DELETE DEVICE



The new password is transmitted to the lock as soon as you save it. Make sure that the lock is turned on during the saving process and that it is within working range.

Old password: ex. '000000'

New password: ex. '000000'

Confirm new password: ex. '000000'

CHANGE PASSWORD



- Unesite trenutno važeću lozinku pod „Stara lozinka“ (0-0-0-0-0-0).
- Unesite novu 6-cifrenu lozinku koju ste odabrali za "Novu lozinku"
- Preuzmite novu lozinku koju ste odabrali na "Potvrđi novu lozinku"
- Pritisnite "PROMIJENI LOZINKU" da biste potvrdili novu lozinku.

Prikazuje se "Lozinka uspješno promijenjena".

## **DODATNA PRAVA PRISTUPA**

- 1) Preuzmite aplikaciju „RottnerUNLOCK“ sa Google Playstore (Android) ili APP Store (IOS) i instalirajte je.
- 2) Otvorite APP "RottnerUNLOCK"



WELCOME TO ROTTNER SMART LOCK!

Rottner is helping you with everything you need to get started so that you can enjoy comfort and security.



During the pairing process, the phone must not be further away than 2 meters from the lock.



Pritisnite dugme "+" da dodate Bluetooth zaključavanje.



Searching for devices



Odaberite odgovarajuću Bluetooth bravu.



OKUSS0M1  
FB:EC91BD63A

Please scan the QR code which you can find in the packaging.

SCANNING



Pritisnite „Skeniranje“



Skenirajte QR kôd na poklopcu odjeljka za baterije

Name: OKUSS0M1

Id: FB:FE:C9:1B:D0:3A

Password: ex. '000000'

Repeat password: ex. '000000'

**Security level** ⓘ

Password	<input type="radio"/>
OneClick	<input type="radio"/>
Fingerprint	<input type="radio"/>
Proximity	<input checked="" type="radio"/>



Unesite tvorničku lozinku (0 - 0 - 0 - 0 - 0 - 0).

Potvrdite tvorničku lozinku (0 - 0 - 0 - 0 - 0 - 0)

Odaberite željenu vrstu otvaranja za BlueTooth bravu ispod stavke "Nivo sigurnosti".

• Lozinka: Otvara se brava BlueTooth - „RottnerUNLOCK“ unošenjem prethodno dodijeljene lozinke.

- Jedan klik: otvara se brava BlueTooth - „RottnerUNLOCK“ pritiskom na „ „.
- Otisak prsta: Otiskom prsta otvara se brava BlueTooth - „RottnerUNLOCK“.
- Blizina: Otvara se brava BlueTooth - „RottnerUNLOCK“ držanjem mobilnog telefona u radijusu od najviše 2 metra.

Repeat password: ex. '000000'

**Security level** ⓘ

Password	<input type="radio"/>
OneClick	<input type="radio"/>
Fingerprint	<input type="radio"/>
Proximity	<input type="radio"/>

Add connection



Na početni ekran sada možete dodati prečicu za zaključavanje Bluetooth-a.  
Spremite postavke pritiskom na □

## OTVORITE SEF UPOTREBOM APLIKACIJE

PRIMJER:

Otvorite "jednim klikom"

Otvorite aplikacijom "RottnerUNLOCK"



WELCOME TO ROTTNER SMART LOCK!

Rottner is helping you with everything you need to get started so that you can enjoy comfort and security.

Bluetooth MusterTresor



Odaberite bravu koju želite otvoriti



Bluetooth connection with lock

CONNECTED



UNLOCK



Pritisnite



Bluetooth connection with lock.


CONNECTED



Unlock successful

Brava je otvorena - Sada okrenite / gurnite ručku vašeg sefa do kraja.

### OTVARANJE SEFA PREČICOM

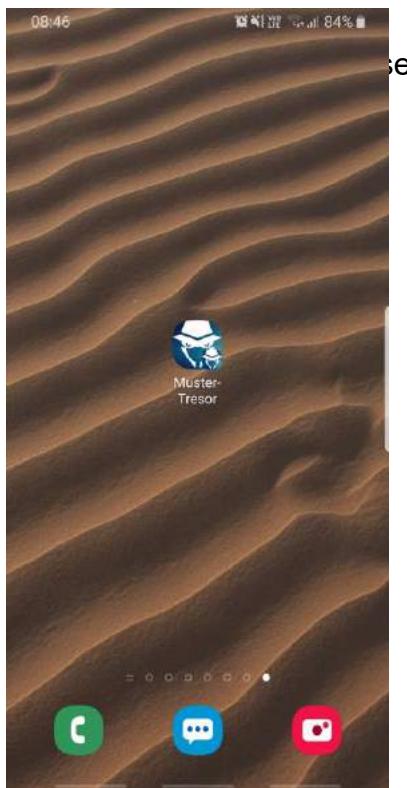



Bluetooth connection with lock

CONNECTED



UNLOCK



Unlock successful

Veza s elektroničkom bravom automatski se uspostavlja i otključava.  
Sada okrenite / gurnite okretnu ručku do kraja da otvorite sef.

### **ZAKLJUČAVANJE SEFA**

Zaključajte vrata i okrenite / pomaknite ručicu za otvaranje do kraja.  
Provjerite je li vaš sef pravilno zaključan.

### **MEHANIČKO OTVARANJE ZA SLUČAJ NUŽDE**

Ako su baterije prazne ili elektroničko otvaranje nije moguće, postupite na sljedeći način:

1. Uklonite poklopac brave za slučaj nužde na svom sefu
2. Umetnute jedan od dva ključa za otvaranje u slučaju nužde koji ste dobili uz sef
3. Okrenite ključ za hitno otvaranje u smjeru kazaljke na satu do kraja
4. Okrenite / pomaknite ručicu za otvaranje do kraja i otvorite vrata.
5. Vratite ključ za hitno otvaranje u početni položaj i izvadite ga

### **PROMJENA BATERIJE**

1. Otvorite odjeljak za baterije na unutrašnjoj strani vrata.
2. Izvadite umetnute baterije.
3. Instalirajte dvije [2] nove visokokvalitetne 1,5-voltne AA baterije.
4. Provjerite je li polaritet baterija ispravan kako biste izbjegli oštećenje elektronike

### **NAPOMENA:**

NE SAVJETUJE SE upotreba nealkalnih baterija